

MS NMO Mesh filter bag

General Description

MS [®] Monofilament Mesh Filter Bag (NMO) is constructed using a woven fabric. Each thread is a single filament, providing excellent strength with no fiber migration. The fabric is designed with evenly spaced holes. The monofilament yarn used in the fabric is extremely abrasion resistant to a broad range of chemicals, unaffected by metal fatigue or corrosion, has no loose fibers and boasts high tensile strength. Its accuracy rating is 25-1250µm.

Feature

- Monofilament mesh structure
- Fixed aperture
- Good stretch-proof performance
- Stainless steel or self-sealing plastic collar
- Strengthened outer lining hem
- Suitable to intercept rigid impurity and high viscosity fluid
- · Easy to clean



Specifications /

Code	Material	Temperature	Chemical	Filtration Accuracy (μm)
			Resistance	
NMO	Nylon	<170 ℃	Water, Aromatics, Aliphatic, Alkali	25,50,80,100,125,150,175,200,
				250,300,400,600,800,1000,1250

www.membrane-solutions.com

USA

Toll free: 866-528-4572 Fax: 732-412-4040

Address: 1108 Spring View Lane Plano, TX 75075

China

Toll free: 400-620-1660 Fax: 0086-21- 51687551

Address: 2202, No.1759 North Zhongshan Road, Shanghai




Applications



- Prefiltration in Metallurgy industry
- · Degreasing in automotive industry
- Raw water filtration in Water treatment industry
- Coolant filtration in Paint industry
- Cutting fluid filtration in machine industry
- Coarse filtration in chemical industry
- · Recycled water filtration in paper mill

Part Numbers / Ordering Information

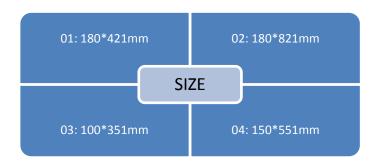

FOR EXAMPLE

FBNMO050P01P/S	FBFilter bag	NMO Nylon Monofilament mesh
	050Ppore size: 50μm	01P/Ssize: 01, Plastic/ stainless steel gasket

www.membrane-solutions.com

USA

Toll free: 866-528-4572 Fax: 732-412-4040

Address: 1108 Spring View Lane Plano, TX 75075

China

Toll free: 400-620-1660 Fax: 0086-21- 51687551

Address: 2202, No.1759 North Zhongshan Road, Shanghai